

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number  
**WO 2004/027756 A1**

(51) International Patent Classification<sup>7</sup>: **G10L 13/06**

SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:  
PCT/IB2003/003624

(22) International Filing Date: 8 August 2003 (08.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02078872.5 17 September 2002 (17.09.2002) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GIGI, Ercan, F.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: **DUIJVESTIJN, Adrianus, J.**; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **SPEECH SYNTHESIS USING CONCATENATION OF SPEECH WAVEFORMS**

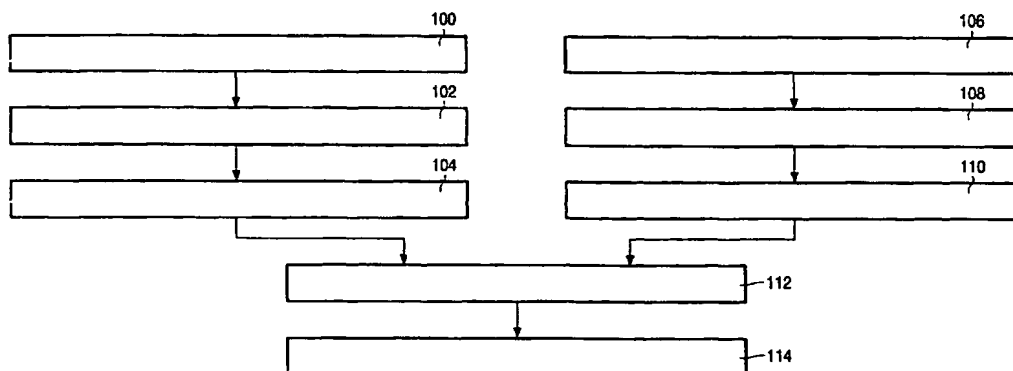

(57) Abstract: The invention relates to a method of synthesizing of a speech signal, the speech signal having at least a first speech unit and a second speech unit, the method comprising the steps of: providing a first speech unit signal, the first speech unit signal having an end interval, providing a second speech unit signal, the second speech unit signal having a front interval, appending of at least some of the periods of the end interval in inverted order at the end of the first speech unit signal to provide a fade-out interval, appending of at least some of the periods of the front interval in inverted order at the beginning of the second speech unit signal to provide a fade-in interval, superposing of the end and fade-in intervals and of the fade-out and front intervals.

TO / PCT/PTO 15 MAR 2005

SPEECH SYNTHESIS USING CONCATENATION OF SPEECH WAVEFORMS

Present invention relates to the field of synthesizing of speech or music, and more particularly without limitation, to the field of text-to-speech synthesis.

The function of a text-to-speech (TTS) synthesis system is to synthesize speech from a generic text in a given language. Nowadays, TTS systems have been put into practical operation for many applications, such as access to databases through the telephone network or aid to handicapped people. One method to synthesize speech is by concatenating elements of a recorded set of subunits of speech such as demi-syllables or polyphones. The majority of successful commercial systems employ the concatenation of polyphones.

The polyphones comprise groups of two (diphones), three (triphones) or more phones and may be determined from nonsense words, by segmenting the desired grouping of phones at stable spectral regions. In a concatenation based synthesis, the conversation of the transition between two adjacent phones is crucial to assure the quality of the synthesized speech. With the choice of polyphones as the basic subunits, the transition between two adjacent phones is preserved in the recorded subunits, and the concatenation is carried out between similar phones.

Before the synthesis, however, the phones must have their duration and pitch modified in order to fulfil the prosodic constraints of the new words containing those phones. This processing is necessary to avoid the production of a monotonous sounding synthesized speech. In a TTS system, this function is performed by a prosodic module. To allow the duration and pitch modifications in the recorded subunits, many concatenation based TTS systems employ the time-domain pitch-synchronous overlap-add (TD-PSOLA) (E. Moulines and F. Charpentier, "Pitch synchronous waveform processing techniques for text-to-speech synthesis using diphones," Speech Commun., vol. 9, pp. 453-467, 1990) model of synthesis.

In the TD-PSOLA model, the speech signal is first submitted to a pitch marking algorithm. This algorithm assigns marks at the peaks of the signal in the voiced segments and assigns marks 10 ms apart in the unvoiced segments. The synthesis is made by a superposition of Hanning windowed segments centered at the pitch marks and extending from the previous pitch mark to the next one. The duration modification is provided by deleting or replicating some of the windowed segments. The pitch period modification, on

the other hand, is provided by increasing or decreasing the superposition between windowed segments.

Despite the success achieved in many commercial TTS systems, the synthetic speech produced by using the TD-PSOLA model of synthesis can present some drawbacks, mainly under large prosodic variations.

Example of such PSOLA methods are those defined in documents EP-0363233, U.S. Pat. No. 5,479,564, EP-0706170. A specific example is also the MBR-PSOLA method as published by T. Dutoit and H. Leich, in Speech Communication, Elsevier Publisher, November 1993, vol. 13, N.degree. 3-4, 1993. The method described in document U.S. Pat. No. 5,479,564 suggests a means of modifying the frequency by overlap-adding short-term signals extracted from this signal. The length of the weighting windows used to obtain the short-term signals is approximately equal to two times the period of the audio signal and their position within the period can be set to any value (provided the time shift between successive windows is equal to the period of the audio signal). Document U.S. Pat. No. 5,479,564 also describes a means of interpolating waveforms between segments to concatenate, so as to smooth out discontinuities. In prior art text-to-speech systems a set of pre-recorded speech fragments can be concatenated in a specific order to convert a certain text into natural sounding speech. Text-to-speech systems that use small speech fragments have many such concatenation points. Especially when the speech fragments are spectrally different, these joins produce artefacts that reduce the intelligibility. In particular, when two speech segments from different recording times are to be concatenated, the resulting speech can have a discontinuity at the joint of the two segments. For example, when a vowel is synthesized, the left part mostly comes from a different recording than the right part. This makes it impossible to reproduce the exact color of a vowel.

The slight differences in the formant trajectories produce a sudden jump at the joint location. What is mostly done in the prior art to reduce this effect is to re-record the speech fragment until it matches with the rest or add different versions (extra fragments) to minimize the difference.

The present invention therefore aims to provide an improved method of synthesizing of a speech signal, the speech signal having at least a first diphone and a second diphone. The present invention further aims to provide a corresponding computer program product and computer system, in particular text-to-speech system.

The present invention provides for a method of synthesizing of speech signal based on first and second diphone signals which are superposed at their joint. The invention

enables a smooth concatenation of the diphone signals without any audible artefacts. This is accomplished by appending periods of an end interval of the first diphone signal in inverted order at the end of the first diphone signal and by appending periods of a front interval of the second diphone signal at the beginning of the second diphone signal. The end and front intervals are overlapped to produce the smooth transition.

In accordance with an embodiment of the invention the end and front intervals of the first and second diphone signal are identified by a marker. Preferably the end and front intervals contain periods which are about steady, i.e. which have approximately the same information content and signal form. Such end and front intervals can be identified by a human expert or by means of a corresponding computer program. Preferably the first analysis is performed by means of a computer program and the result is reviewed by a human expert for increased precision.

In accordance with a further embodiment of the invention the last period of the end interval and the first period of the front interval are not appended. This has the advantage that no periodicity is introduced into the signal by the immediate repetition of two identical periods.

In accordance with a further embodiment of the invention a windowing operation is performed on the end and front intervals as well as on the respective appended periods by means of fade-out and fade-in windows, respectively. Preferably a raised cosine window function is used for voiced end intervals and the appended periods, whereas for unvoiced end intervals and the appended periods a sine window is used as a fade-out window. Likewise a raised cosine is used as a window function for smoothening the beginning of a voiced segment of the second diphone or a sine window for unvoiced segments.

In accordance with an embodiment of the invention a duration adaptation is performed for the intervals to be overlapped. Especially if the intervals have different durations this is advantageous in order to avoid the introduction of abrupt signal transitions.

In accordance with a further embodiment of the invention, text-to-speech processing is performed by concatenating diphones in accordance with the principles of the present invention. This way a natural sounding speech output can be produced.

It is important to note that the present invention is not restricted to the concatenation of diphones but can also be advantageously employed for the concatenation of other speech units such as triphones, polyphones or words.

In the following embodiments of the invention are described in greater detail by making reference to the drawings in which:

Fig. 1 depicts a flow chart of a preferred embodiment of a method of the invention,

Fig. 2 depicts the interleaved repetition of periods at the end and the front of the original diphone signals,

Fig. 3 depicts an example for a signal synthesis, and

Fig. 4 depicts a block diagram of an embodiment of a text-to-speech system.

Fig. 1 shows a flow diagram which illustrates a preferred embodiment of a method of the present invention. In step 100 a first diphone signal A is provided. The diphone signal A has at least one marker which identifies an end interval of the diphone A signal.

In step 102 periods within the end interval of the diphone signal A are repeated in inverted order in order to provide a fade-out interval which is appended at the end of the end interval. In step 104 the end interval with its' appended fade-out interval are windowed by means of a fade-out window function in order to smoothly fade out the diphone signal at its' end. Likewise a diphone signal B is provided in step 106. The diphone signal B has at least one associated marker in order to identify a front segment of the diphone signal B. In step 108 at least some of the front intervals periods are appended at the beginning of the front interval of the diphone signal B in inverted order. This way a fade-in interval is provided. In step 110 the front interval and the appended fade-in interval are windowed by means of a fade-in window. This way a smooth beginning of the diphone signal B is provided. In step 112 a duration adaptation is performed. This means that the durations of the end and front intervals of the diphone signals A and B are modified such that the end and fade-in intervals have the same duration. Likewise the durations of the fade-out and front intervals are adapted. In step 114 an overlap and add operation is performed on the diphone signals A and B with the processed end and fade-in intervals and the fade-out and front intervals. This way a smooth concatenation of the diphone signals A and B is accomplished. For voiced segments usage of the following raised cosine window function is preferred:

$$w[n] = 0.5 - 0.5 \cdot \cos\left(\frac{\pi \cdot (n + 0.5)}{m}\right), \quad 0 \leq n < m$$

where  $m$  is the total number of periods in the smoothing range.

For unvoiced segments, a sine window is used:

$$w[n] = \sin\left(\frac{0.5 \cdot \pi \cdot (n + 0.5)}{m}\right), \quad 0 \leq n < m$$

5

The advantage of using a sine-window is that this ensures that the total signal envelope in power-domain remains constant. Unlike a periodic signal, when two noise samples are added, the total sum can be smaller than the absolute value of any of the two samples. This is because the signals are (mostly) not in-phase. The sine-window adjusts for this effect and removes the envelope-modulation.

Fig. 2 illustrates the process of appending interval periods in inverted order (cf. steps 102 and 108 of figure 1). Time axis 200 illustrates the time domain of diphone signal A. The diphone signal A has an end interval 202 which contains periods  $p_1, p_2, \dots, p_i, \dots, p_{N-1}, p_N$ . In order to provide fade-out interval 204 periods  $p_i$  of the end interval 202 are appended at the end of the end interval 202 in inverted order. The last period  $p_N$  of the end interval 202 is not appended in order to avoid a repetition of two identical periods which would introduce an unintended periodicity. Such a periodicity could become audible under certain circumstances. It is therefore preferred not to repeat the least period  $p_N$  of the end interval 202. The first period  $p'_1$  of the fade-out interval 204 is provided by copying the signal of period  $p_{N-1}$ . In general, period  $p'_j$  of fade-out interval 204 is obtained by appending period  $p_{N-j}$  from the end interval 202, i.e.  $p'_j = p_{N-j}$ . Time axis 206 is illustrative of the time domain of diphone signal B. Diphone signal B has a front interval 208 containing periods  $P_1, P_2, \dots, P_i, \dots, P_{N-1}, P_N$ . Fade-in interval 210 is provided by appending periods from front interval 208 at the beginning of front interval 208 in inverted order. Again it is preferred not to append the first period  $P_1$  of the front interval 208 to avoid the introduction of unintended periodicity. In the general case a signal period  $P'_j$  is obtained from the period  $P_{N-j+1}$  of the front interval 208, i.e.  $P'_j = P_{N-j+1}$ . For concatenating the diphone signal A and the diphone signal B, the end interval 202 and the fade-in interval 210 are overlapped and added as well as the fade-out interval 204 and front interval 210. In the example considered here this can be done without adapting the durations of the respective intervals, as the durations of the end interval 202 and the fade-in interval 210 as well as the durations of the fade-out interval 204 and the front interval 208 are the same.

Fig. 3 shows an example for the various synthesis steps for the word 'young'. This word is made of the phonemes /j/, /V/, /N/ and the silence /\_/ . a) and b) are the recorded

nonsense words that contain the transitions from /j/ to /V/ and /V/ to /N/. Within each nonsense word five markers are placed. The outer markers are the diphone borders (labels j-, -V, V- and -N). The markers in the middle show where a new phoneme starts (labels V, and N). The other labels are used to mark the segments that will be used for overlap-add. As it is illustrated in the diagram (c) of figure 3 the periods of the end interval 300 are repeated in inverted order to provide a fade-out interval 302. All the periods within end interval 300 are appended after period 304 which is the last period of the end interval 300. Period 304 itself is not appended to avoid the repetition of the same period which would introduce an unintended periodicity. Likewise for the diphone signal of diagram (b) of figure 3 the periods within front interval 306 are appended at the beginning of the front interval 306 in inverted order. This applies for all of the period within the front interval 306 except the first period 310 at the beginning of the front interval 306. Again this period 310 is not appended in order to avoid two consecutive identical periods which would introduce an unintended periodicity. The same kind of processing is done for the front interval 312 of the diphone signal of the diagram (a) and for the end interval 314 of the diphone signal of diagram (b). Further the same approach is applied to the further diphones which are required to be concatenated for the synthesis of the word 'young'. Next a smoothening window is applied to the front, end, fade-in and fade-out intervals. For voiced segments a raised cosine is preferably used as a window function. The following window function is employed for the fade-in and front intervals:

$$w[n] = 0.5 - 0.5 \cdot \cos\left(\frac{\pi \cdot (n + 0.5)}{m}\right), \quad 0 \leq n < m$$

where m is the total number of periods in the smoothening range. The corresponding raised cosine is shown as raised cosine 316 in diagram (d). A corresponding window function is used to provide raised cosine 318 for the end and fade-out intervals 300 and 302. As it is illustrated in the diagram (e) the durations of the intervals to be overlapped and added, i.e. intervals 300/308 and intervals 302/306 are rescaled in order to bring them to an equal length. The following superposition of the required diphone provides the synthesis of the word 'young'.

Fig. 4 shows a block diagram of computer system 400, which is a text-to-speech system. The computer system 400 has module 402 which serves to store diphones and markers for the diphones to indicate front and end intervals. Module 404 serves to repeat periods contained in the end and front intervals in inverted order in order to provide fade-in and fade-out intervals. Module 406 serves to provide a window function for windowing the

end/fade-out and fade-in/front intervals for the purposes of smoothening. Module 408 serves for duration adaptation of the intervals to be superposed. Such a duration adaptation is required if the intervals to be superposed are not of equal length. Module 410 serves for the superposition of the end/fade-in and of the fade-out/front intervals in order to concatenate their required diphones. When text is entered into the computer system 400 the required diphones to be concatenated are selected from module 402. These diphones are processed by means of modules 404, 406 and 408 before they are overlapped and added by means of module 410, which results in the required synthesized speech signal.



## CLAIMS:

1. A method of synthesizing of a speech signal, the speech signal having at least a first speech unit and a second speech unit, the method comprising the steps of:
  - providing a first speech unit signal, the first speech unit signal having an end interval,
  - 5 - providing a second speech unit signal, the second speech unit signal having a front interval,
  - appending of at least some of the periods of the end interval in inverted order at the end of the first speech unit signal to provide a fade-out interval,
  - appending of at least some of the periods of the front interval in inverted order
  - 10 at the beginning of the second speech unit signal to provide a fade-in interval,
  - superposing of the end and fade-in intervals and of the fade-out and front intervals.
2. The method of claim 1, whereby the end and front intervals have
- 15 approximately steady periods.
3. The method of claim 1 or 2, the end and front intervals being identified by a marker.
- 20 4. The method of claim 1, 2 or 3, whereby the last period of the end interval and the first period of the front interval are not appended.
5. The method of any one of the preceding claims 1 to 4, further comprising windowing of the end and/or fade-out intervals with a fade-out window.
- 25 6. The method of claim 5, whereby a raised cosine is used as a fade-out window.
7. The method of claim 6, whereby the following window function is used for voiced intervals:

$$w[n] = 0.5 - 0.5 \cdot \cos\left(\frac{\pi \cdot (n + 0.5)}{m}\right), \quad 0 \leq n < m$$

where  $m$  is the total number of periods in a smoothening range.

8. The method of claim 5, whereby a sine window is used as a fade-out window for unvoiced intervals.

5

9. The method of claim 8, whereby the following window function is used:

$$w[n] = \sin\left(\frac{0.5 \cdot \pi \cdot (n + 0.5)}{m}\right), \quad 0 \leq n < m \quad (2.7)$$

where  $m$  is the total number of periods in a smoothening range.

10

10. The method of any one of the preceding claims 1 to 9, the first and second speech units being diphones and/or triphones and/or polyphones, in particular words.

15

11. The method of any one of the preceding claims 1 to 10, further comprising adapting the durations of the end and fade-in intervals and of the fade-out and front intervals.

12. The methods of any one of the preceding claims 1 to 11 whereby the speech signal is synthesized by means of an overlap and add operation.

20

13. Computer program product, in particular, digital storage medium, comprising program means for synthesizing of a speech signal, the speech signal having at least a first speech unit and a second speech unit, the program means being adapted to perform the steps of:

25

- providing a first speech unit signal, the first speech unit signal having an end interval,

- providing a second speech unit signal, the second speech unit signal having a front interval,

- appending of at least some of the periods of the end interval in inverted order at the end of the first speech unit signal to provide a fade-out interval,

30

- appending of at least some of the periods of the front interval in inverted order at the beginning of the second speech unit signal to provide a fade-in interval,

- superposing of the end and fade-in intervals and of the fade-out and front intervals.

14. Computer system, in particular text-to-speech system, for synthesizing of a speech signal, the speech signal having at least a first speech unit and a second speech unit, the computer system comprising:

- means for storing of a first speech unit signal, the first speech unit signal having an end interval, and for storing of a second speech unit signal, the second speech unit signal having a front interval,
- means for appending of at least some of the periods of the end interval in inverted order at the end of the first speech unit signal to provide a fade-out interval,
- means for appending of at least some of the periods of the front interval in inverted order at the beginning of the second speech unit signal to provide a fade-in interval,
- means for superposing of the end and fade-in intervals and of the fade-out and front intervals.

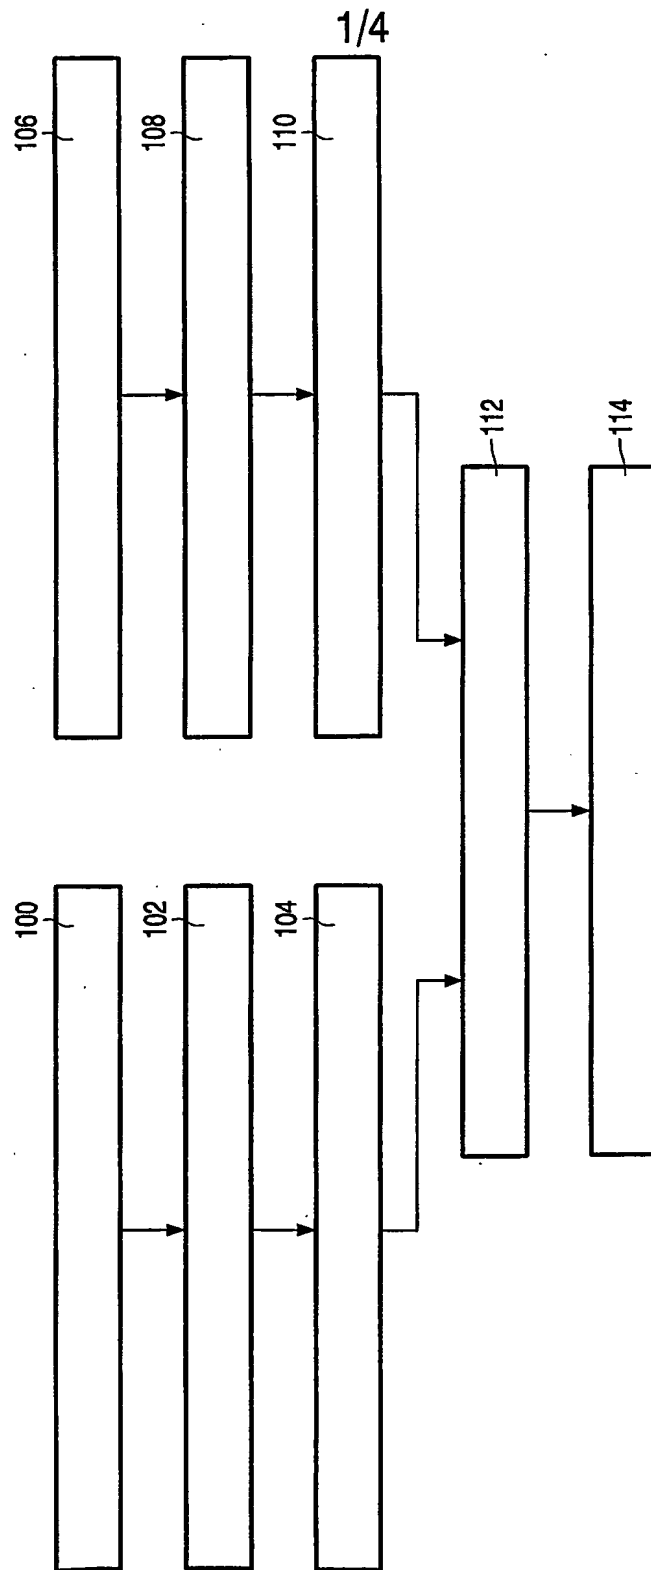


FIG. 1

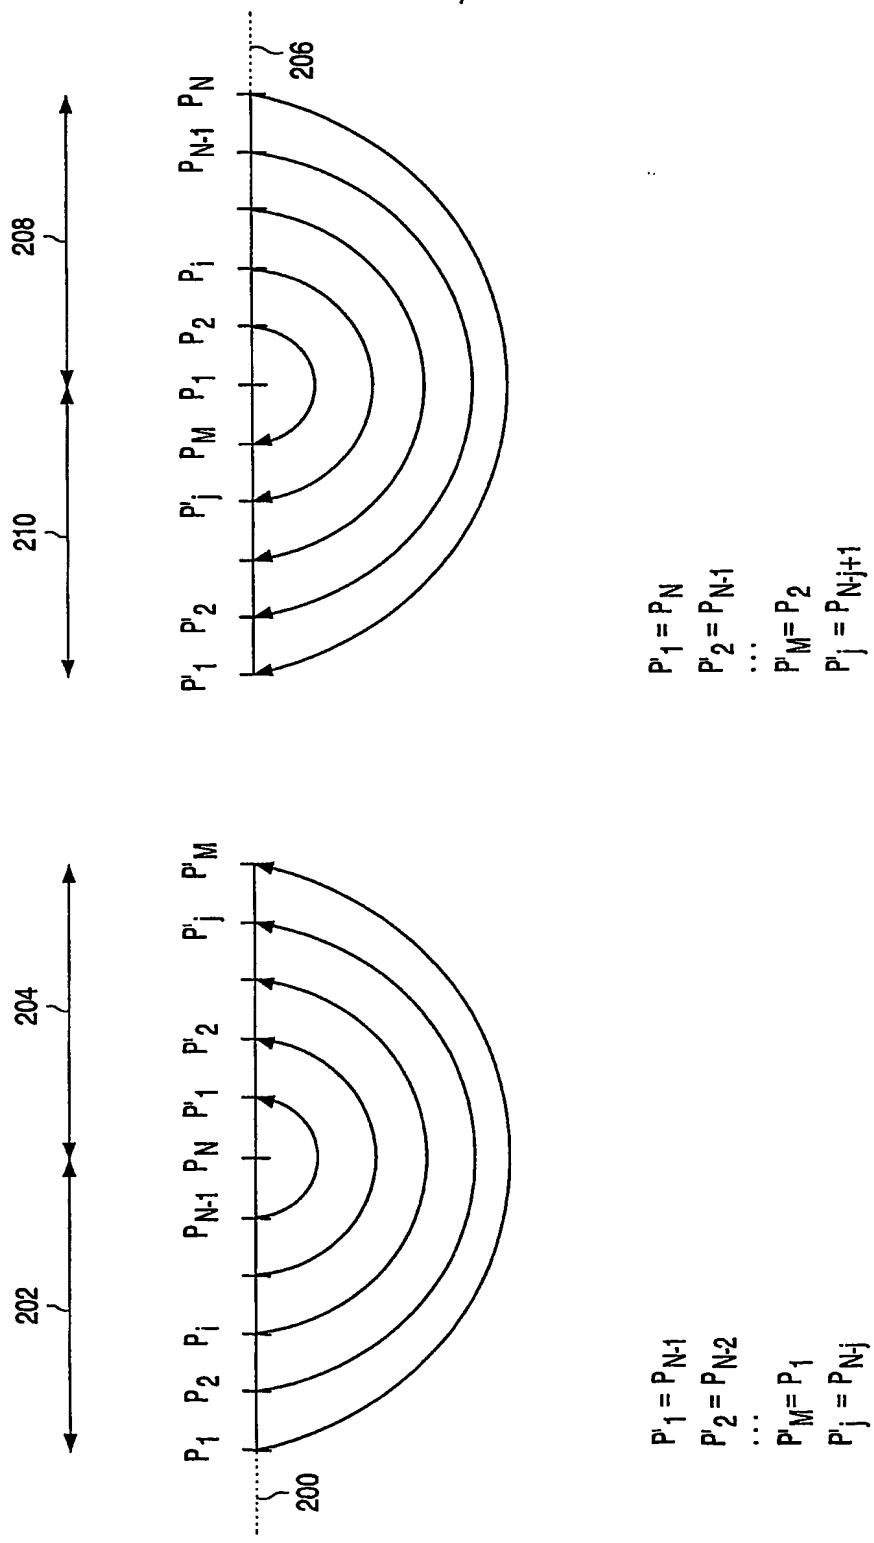


FIG. 2

3/4

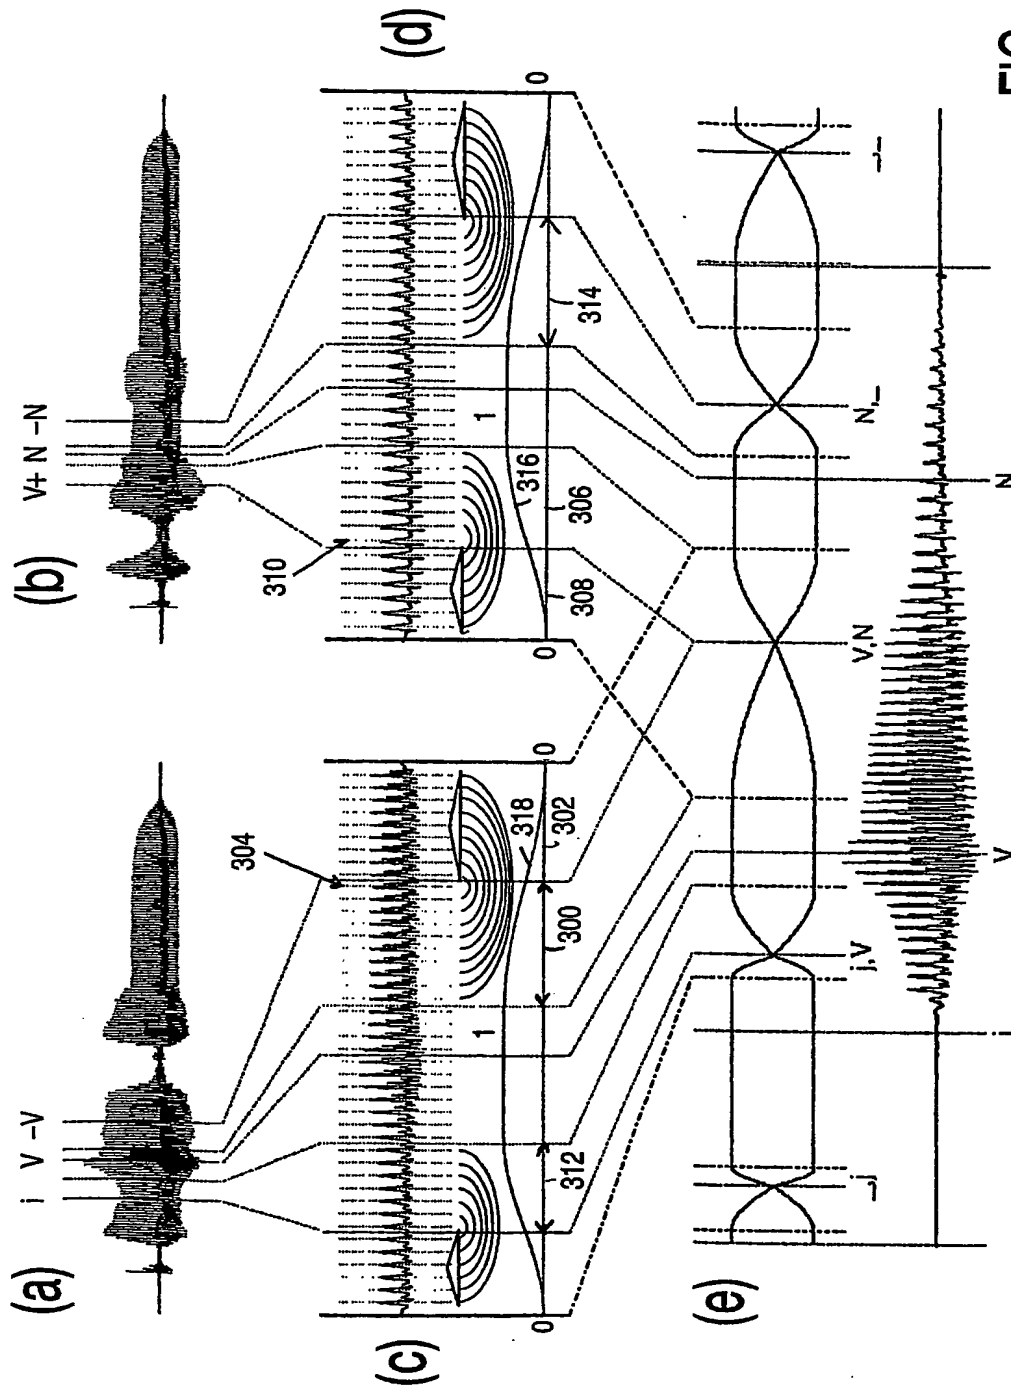


FIG. 3

4/4

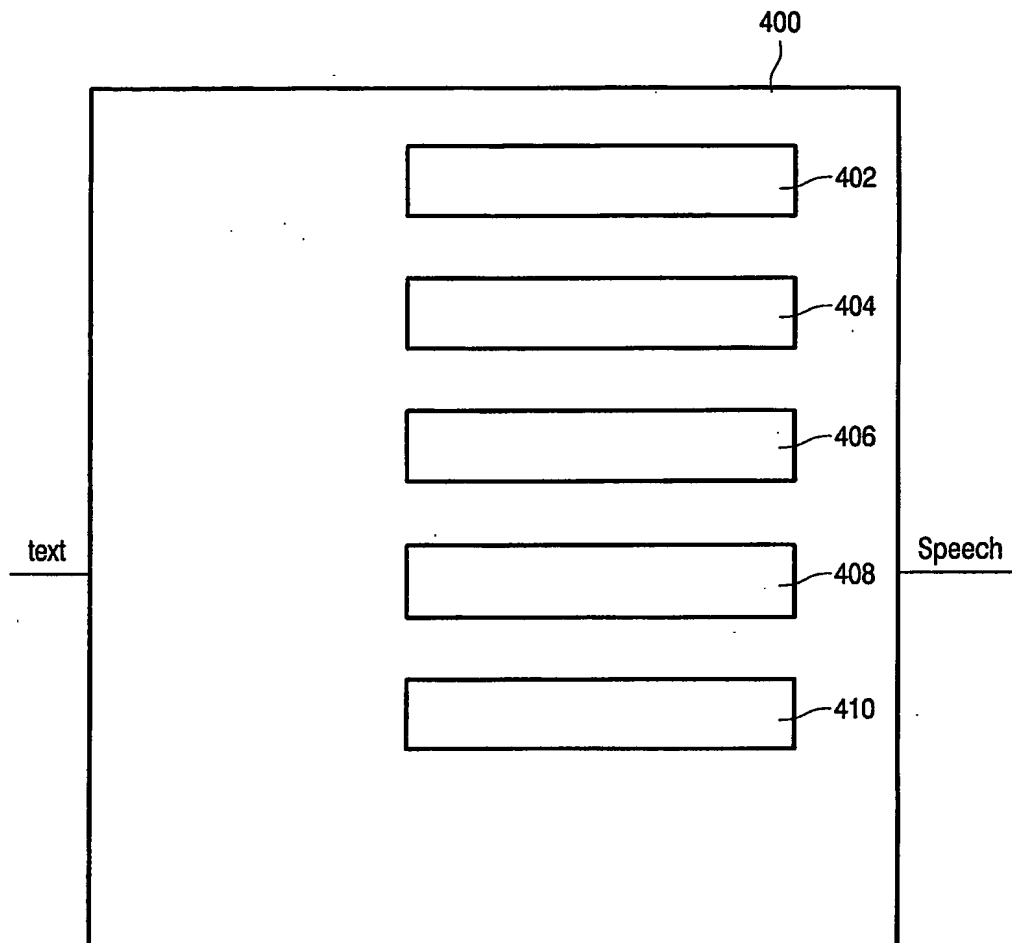


FIG. 4

# INTERNATIONAL SEARCH REPORT

PCT/IB 03/03624

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G10L13/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G10L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 067 519 A (LOWRY ANDREW) 23 May 2000 (2000-05-23) column 3, line 27 -column 4, line 13 ---	1, 13, 14
A	MATSUI K ET AL: "Improving naturalness in text-to-speech synthesis using natural glottal source" SPEECH PROCESSING 2, VLSI, UNDERWATER SIGNAL PROCESSING. TORONTO, MAY 14 - 17, 1991, INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH & SIGNAL PROCESSING. ICASSP, NEW YORK, IEEE, US, vol. 2 CONF. 16, 14 April 1991 (1991-04-14), pages 769-772; XP010043087 ISBN: 0-7803-0003-3 section 3.1 on page 770 ----- -/--	1, 13, 14

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

18 November 2003

Date of mailing of the international search report

27/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ramos Sánchez, U



## INTERNATIONAL SEARCH REPORT

PCT/IB 03/03624

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 427 485 A (CANON KK) 15 May 1991 (1991-05-15) page 15, line 15 - line 38 -----	1,13,14
A	MOULINES E ET AL: "PITCH-SYNCHRONOUS WAVEFORM PROCESSING TECHNIQUES FOR TEXT-TO-SPEECH SYNTHESIS USING DIPHONES" SPEECH COMMUNICATION, ELSEVIER SCIENCE PUBLISHERS, AMSTERDAM, NL, vol. 9, no. 5 / 6, 1 December 1990 (1990-12-01), pages 453-467, XP000202900 ISSN: 0167-6393 page 454 -page 463 -----	1,13,14

## INTERNATIONAL SEARCH REPORT

PCT/IB 03/03624

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6067519	A	23-05-2000	AU 707489 B2	08-07-1999
			AU 5159696 A	30-10-1996
			CA 2189666 A1	17-10-1996
			CN 1181149 A	06-05-1998
			DE 69615832 D1	15-11-2001
			DE 69615832 T2	25-04-2002
			EP 0820626 A1	28-01-1998
			WO 9632711 A1	17-10-1996
			HK 1008599 A1	07-06-2002
			JP 11503535 T	26-03-1999
			NO 974701 A	10-10-1997
			NZ 304418 A	26-02-1998
<hr/>				
EP 0427485	A	15-05-1991	JP 3149600 A	26-06-1991
			JP 3203798 A	05-09-1991
			JP 3109807 B2	20-11-2000
			JP 3203799 A	05-09-1991
			JP 2675883 B2	12-11-1997
			JP 3203793 A	05-09-1991
			JP 3203800 A	05-09-1991
			JP 3198098 A	29-08-1991
			DE 69028072 D1	19-09-1996
			DE 69028072 T2	09-01-1997
			EP 0427485 A2	15-05-1991
			US 5220629 A	15-06-1993